


PNP Silicon Power Transistors

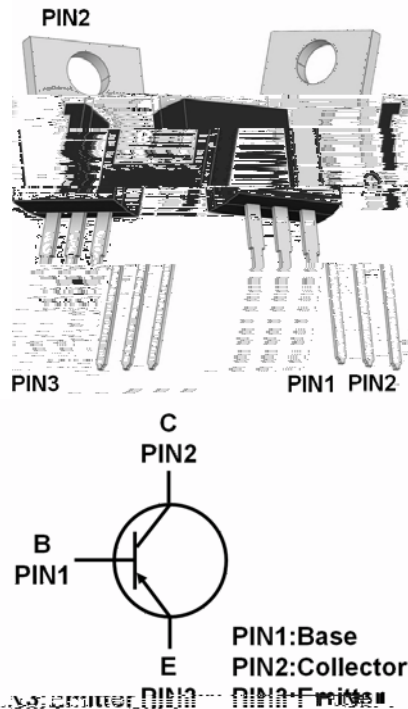

Features

Epoxy Meets UL 94 V-0 Flammability Rating
Halogen Free

Applications

Complement to TIP41C
High switching speed

Mechanical Data

Package: TO-220AB
Terminals: Tin plated leads, solderable per J-STD-002 and JESD22-B102
Unit Weight: 1.9g

Maximum Ratings (Ta=25 unless otherwise noted)

Item	Symbol	Unit	Value
Device marking code			TIP42C
Collector-base voltage	V_{CBO}	V	-100
Collector-emitter voltage	V_{CEO}	V	-100
Emitter-base voltage	V_{EBO}	V	-5
Collector current	I_C	A	-6
Power dissipation	P_D	W	2
Thermal resistance, junction-to-ambient (Note1)	R_{thJA}	°C/W	62.5
Junction temperature	T_j	°C	-55 to +150
Storage temperature	T_{STG}	°C	-55 to +150

Note1 Device mounted on PCB with minimum recommended pad layout and additional heat sink (25mm x 23mm x 15mm) attached.



TIP42C






RoHS
COMPLIANT

Electrical Characteristics (Ta=25 unless otherwise noted)

Item	Symbol	Unit	Conditions	Min	Typ	Max
Collector-base breakdown voltage	$V_{(BR)CBO}$	V	$I_C = -100\mu A, I_E = 0$	-100		



Characteristics(Typical)

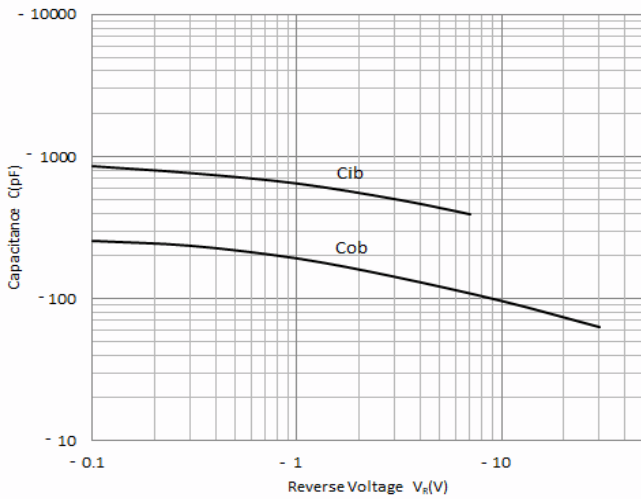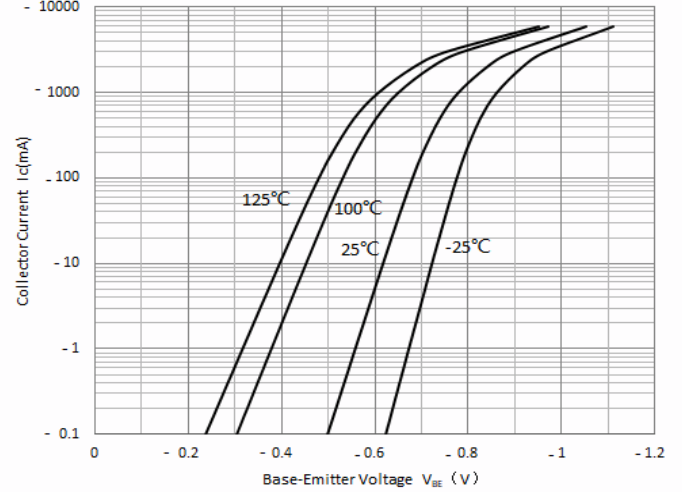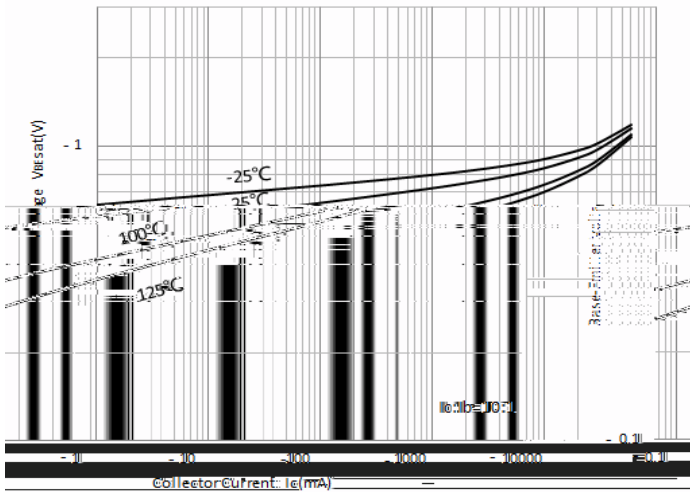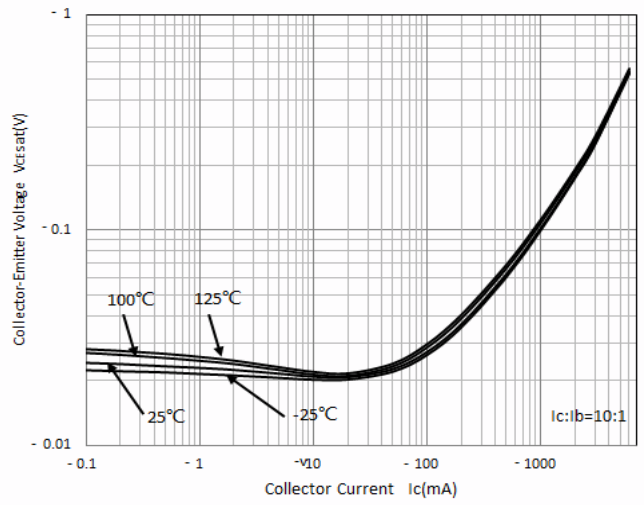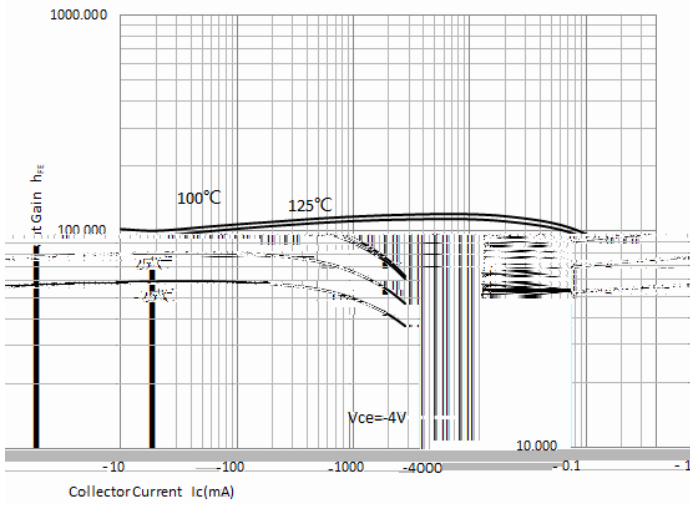





Ordering Information (Example)

PREFERED P/N	PACKING CODE	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
TIP42C	B1	50/Tube	1000	2000	Tube

TO-220AB Package information

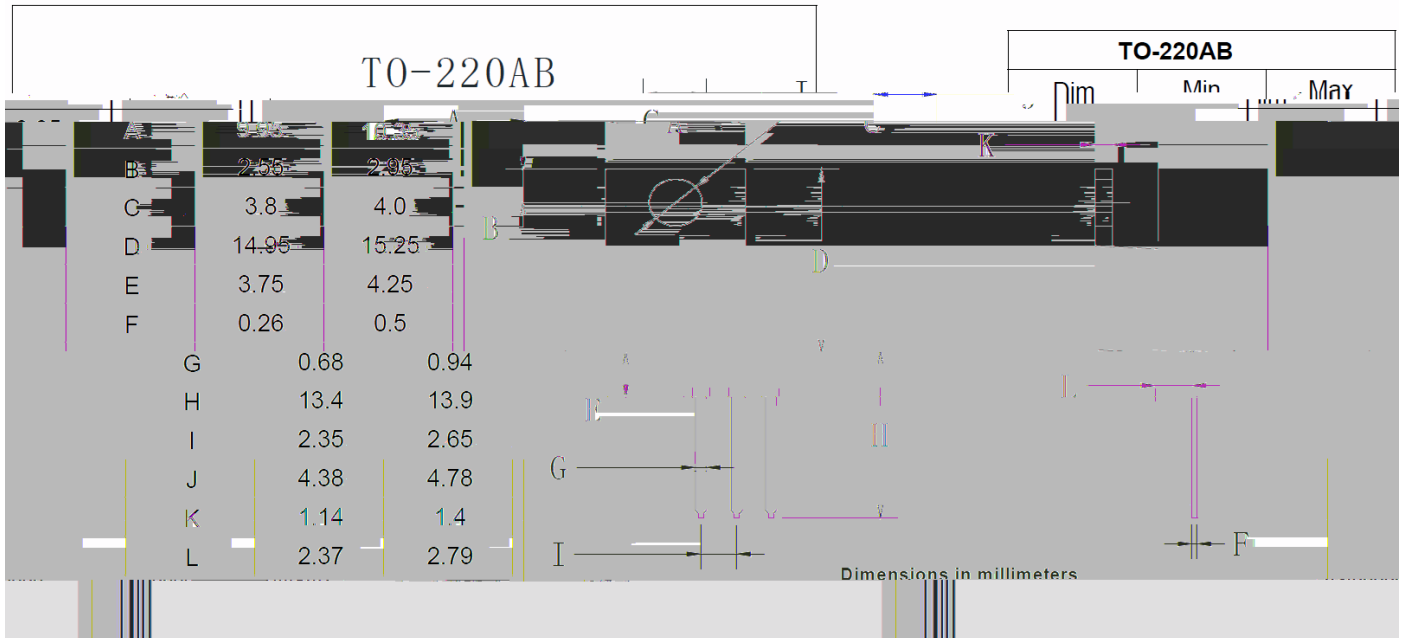

Marking code

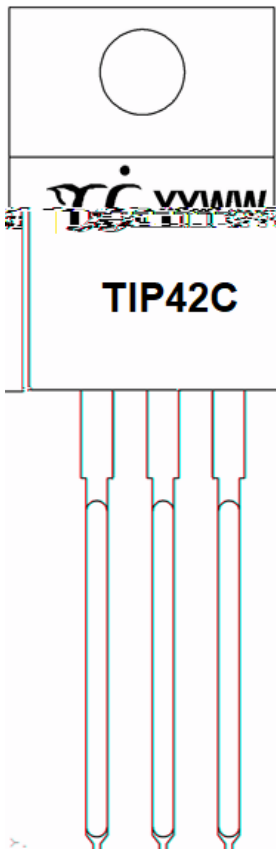

Yangjie LOGO
 YYWW YY, years; WW, week.
 For example, 24 represents 2024; 01 represents the first week of this year.
 TIP42C: Product model.



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with automotive electronics are not designed for use in medical, life-saving, lifesustaining, or military, Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.